

MOM5

Multi-Output Access Control Power Distribution Module

Altronix MOM5 power distribution module converts one (1) non power-limited DC voltage input to five (5) power-limited outputs. Each output will route power to a variety of access control hardware and devices which includes Mag Locks, Electric Strikes, Magnetic Door Holders, etc. These outputs will operate in both fail-safe and fail-secure modes. Controlled trigger input is achieved through normally open (NO) or normally closed (NC) supervised input or the polarity reversal from an FACP (Fire Alarm Control Panel). A form "C" dry output relay will enable HVAC Shutdown, Elevator Recall or trigger auxiliary devices.



MOM5

Specifications

Input

Voltage 12VDC or 24VDC from power supply.

Output

Five (5) individual Class 2 Rated PTC protected power-limited outputs (auto-resettable).

Voltage 12VDC or 24VDC.

Current 2.5A continuous supply current.
Current limit is 2A per output.

Other Short circuit and thermal overload protection.
Filtered and regulated.

Fire Alarm Interface

Fire Alarm Panel or Access Control System trigger inputs
N.O. or N.C. supervised trigger input and polarity reversal trigger input.

Supervision

Power Failure Form "C" contact rated 1A 28VDC/115VAC.

Trigger Form "C" contact rated 1A 28VDC/115VAC.

Indicators (LED)

Input	Power is present.
Input Trigger	On.
Outputs (Individual LEDs)	Output fail.

Agency Listings

UL294	Access Control
UL1481	Fire Alarm
ULC-S318-96	Burglar Alarm
CE	European Conformity
NFPA Compliant.	

Physical and Environmental

Dimensions (L x W x H)	5.25" x 3.5" x 1" (133.4mm x 88.9mm x 25.4mm).
Product Weight	0.3 lbs. (0.13 kg).
Shipping Weight	0.4 lbs. (0.18 kg).
Temperature	
Operating	0°C to 49°C (32°F to 120°F).
Storage	-20°C to 70°C (-4°F to 158°F).
Relative Humidity	85% +/-5%.


Lifetime Warranty

MOM5

Multi-Output Access Control Power Distribution Module

Board Dimensions (L x W x H) and Drawing

5.25" x 3.5" x 1" (133.4mm x 88.9mm x 25.4mm)

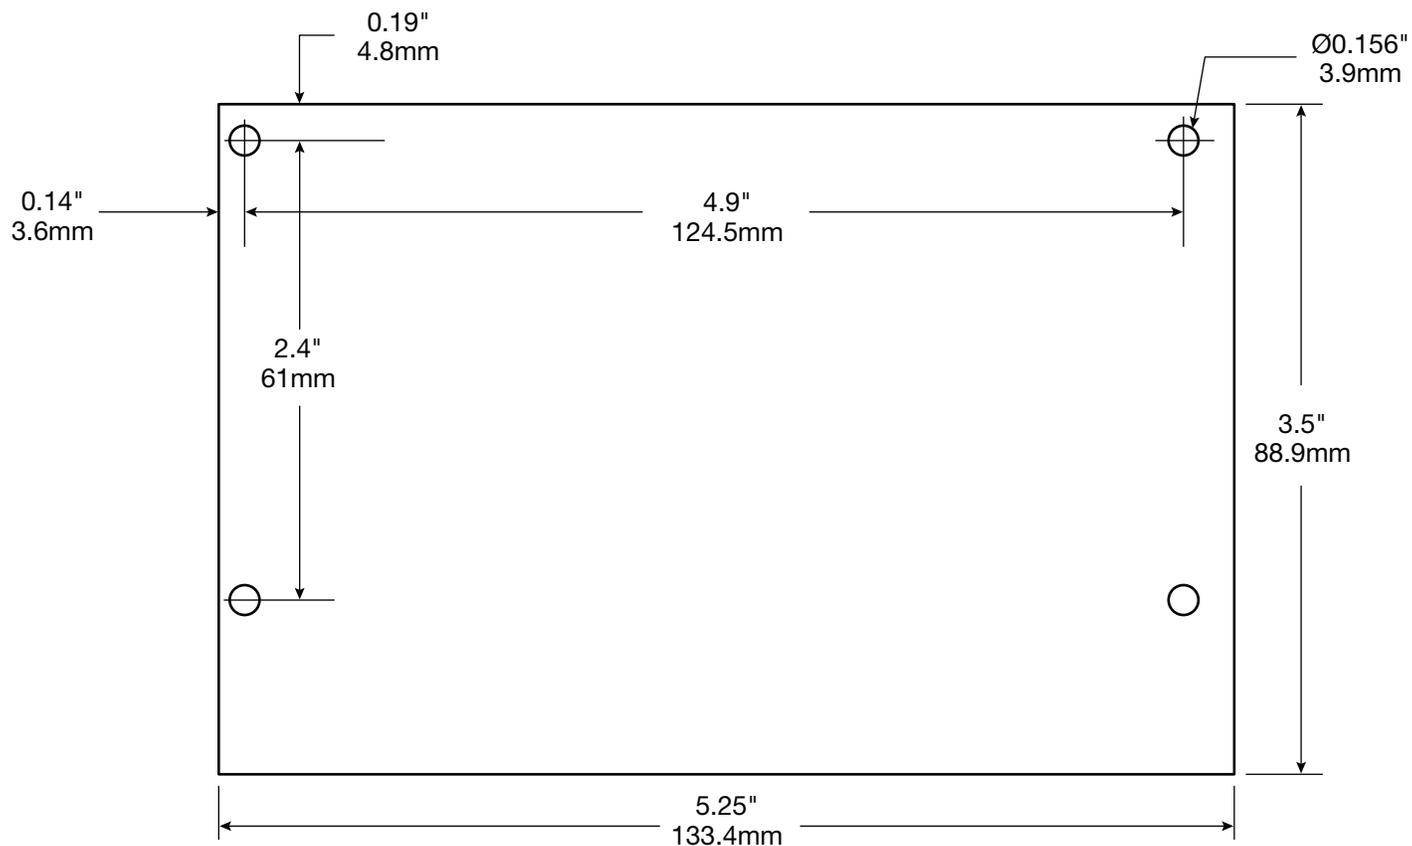

Lifetime Warranty