

### Overview:

PD8UL is a UL Listed Sub-Assembly power distribution module designed to convert a single AC or DC input into eight (8) individually fuse protected outputs.

### Specifications:

#### Agency Listings:

##### • UL Listed Sub-Assembly for



**UL 294\*** Access Control System Units.

**\*Access Control Performance Levels:**

Destructive Attack - N/A (sub-assembly);  
Endurance - IV; Line Security - I;  
Stand-by Power - I.

**UL 603** Power Supplies for Use with Burglar Alarm Systems.

**UL 1481** Power Supplies for Fire Protective Signaling Systems.

##### • cUL Listed:



General Signaling Equipment Evaluated to CSA Standard C22.2 No.205-M1983.  
Power Supplies for Burglar Alarm Systems  
ULC-S318-96.

#### Input:

- 12VDC or 24VDC, up to 10A.
- 24VAC or 28VAC, up to 12A.

#### Outputs:

- Eight (8) individually fuse protected outputs @ 2.5A per output max. current (total output current should not exceed max. current rating of power supply employed).

#### Fuse Ratings:

- Fuses are rated @ 3.5A/250V.

#### Visual Indicators:

- Power On green LED indicator.

#### Board Dimensions (W x L x H approximate):

3.25" x 5.25" x 1" (82.6mm x 133.4mm x 25.4mm).

### Installation Instructions:

Wiring methods shall be in accordance with the National Electrical Code/NFPA 70/NFPA 72/ANSI, and with all local codes and authorities having jurisdiction. Product is intended for indoor use only and should be installed by qualified personnel.

1. Refer to Sub-Assembly Installation Instruction for mounting Rev. MS020119.

2. Mount PD8UL in the desired location/enclosure (mounting hardware included).

3. Connect the desired power supply output to the terminals marked [INPUT] (Fig. 1).

**Note:** Left terminal is NEG. (-) and right terminal is POS. (+) (Fig. 1).

4. Measure output voltage before connecting devices. This helps avoiding potential damage.

5. Connect devices to be powered to the terminal pairs 1 to 4, marked [1P - 1N] through [4P - 4N].

All terminals with common suffix P "1P, 2P..." are the same polarity.

**Note:** This product is a UL Listed Sub-Assembly for use with Altronix UL Listed power supplies as indicated in the installation manuals for the power supply.

**NOTE: DC outputs are power-limited only if a power-limited power supply is employed.**

**CAUTION: To avoid risk of electric shock or fire hazard replace fuses with the same type and rating, 3.5A/250V.**

**Do not expose to rain or moisture.**

(#P) Positive DC outputs

(#N) Negative DC outputs

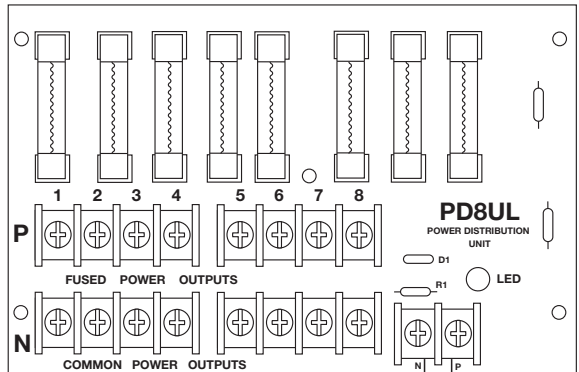


Fig. 1

DC Negative (-)  
Input

DC Positive (+)  
Input

Altronix is not responsible for any typographical errors.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056

website: [www.altronix.com](http://www.altronix.com) | e-mail: [info@altronix.com](mailto:info@altronix.com) | Lifetime Warranty

IIPD8UL - Rev. 020119

D12U