

POE201

56VDC/120W Power Supply/Charger

Altronix POE201 provides 120W for NetWay Spectrum switches with 1Gb SFP ports. It also features a built-in charger for sealed lead acid or gel type batteries.



POE201

Specifications

Input

Voltage 115VAC, 60Hz, 2.5A or
230VAC, 50/60Hz, 1.3A

Output

Voltage 56VDC/120W
Current 2.2A continuous supply current
Maximum Power 120W total power
Integral surge protection

Battery Charging

Type Sealed lead acid or gel type
Failover Upon AC loss, instantaneous
Batteries are sold separately

Physical and Environmental

Dimensions (L x W x H)

Board:
7.0" x 4.0" x 1.375" (177.8mm x 101.6mm x 34.9mm)
Shipping:
10" x 8" x 4" (254mm x 203.2mm x 101.6mm)

Weight (approx.)

Product Weight: 0.7 lb. (0.32 kg)
Shipping Weight: 1.1 lb. (0.5 kg)

Temperature

Operating: - 30°C to 75°C (- 22°F to 167°F)
Storage: - 30°C to 85°C (- 22° to 185°F)

Relative Humidity 85% +/- 5%
BTU/Hr (approx.) 61 BTU/Hr.

Also Available:



WayPoint562

WayPoint562 - High Current Outdoor Power Supply/Charger


POE201 56VDC Power Supply/Charger in a NEMA Rated Outdoor Enclosure

Lifetime Warranty

POE201

56VDC/120W Power Supply/Charger

Typical Applications

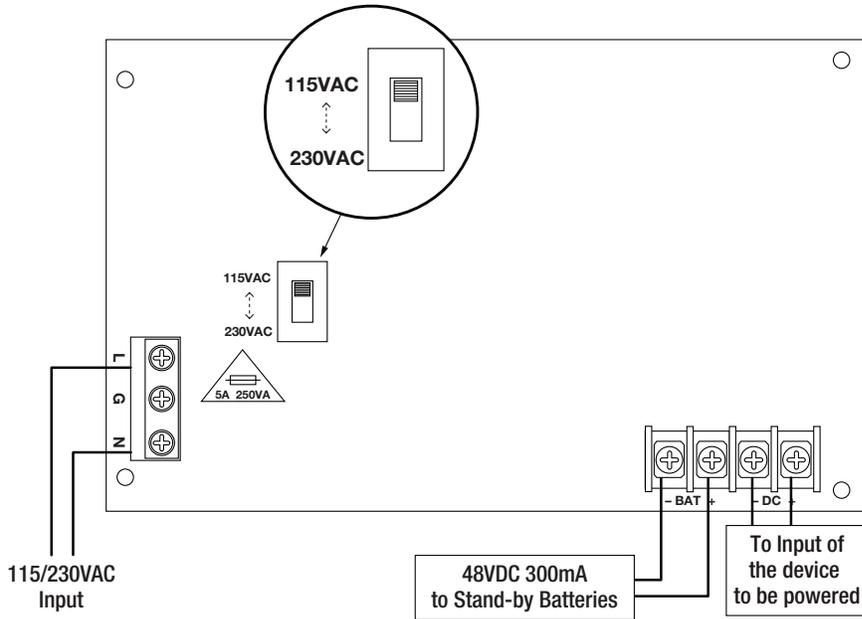


Dimensions and Drawing

Board Dimensions (L x W x H approximate)

7.0" x 4.0" x 1.375" (177.8mm x 101.6mm x 34.9mm)

Mounting Holes' Tolerance: +/- 0.04 in. (1mm)

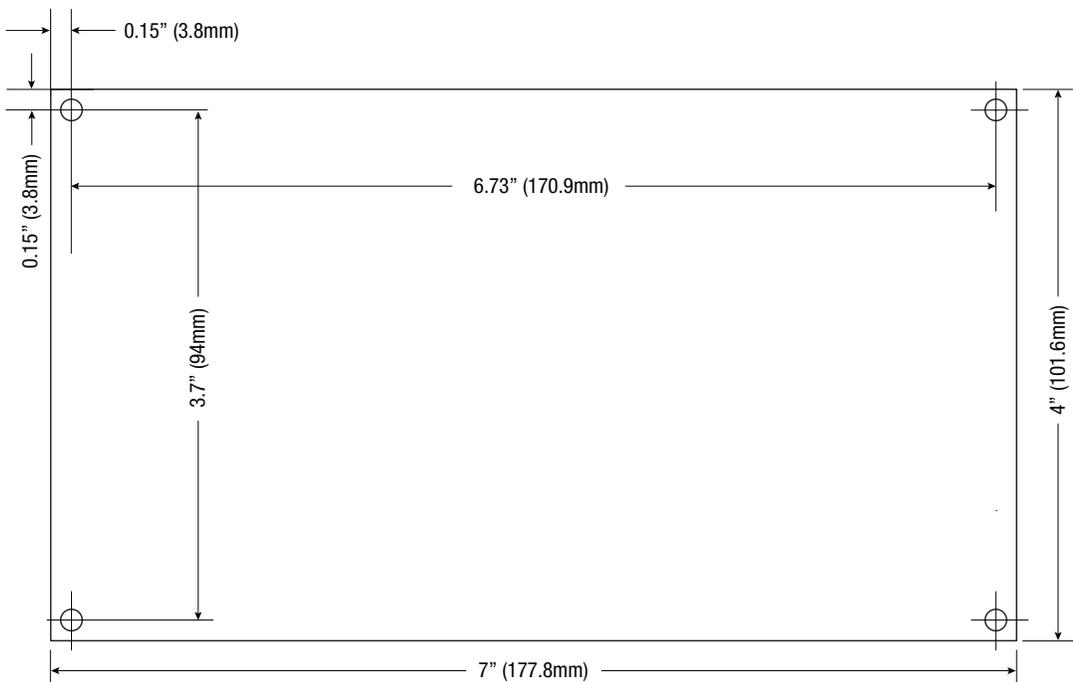

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com